

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 August 2003 (07.08.2003)

PCT

(10) International Publication Number
WO 03/065337 A1

(51) International Patent Classification⁷: **G09G 3/30**

(21) International Application Number: **PCT/KR03/00208**

(22) International Filing Date: 29 January 2003 (29.01.2003)

(25) Filing Language: **Korean**

(26) Publication Language: **English**

(30) Priority Data:
10-2002-0005136 29 January 2002 (29.01.2002) **KR**

(71) Applicant (for all designated States except US): **GRACEL DISPLAY INC.** [KR/KR]; 284-25 Seongsu-dong 2-ga, Seongdong-gu, Seoul 133-833 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SEO, Jong-Wook** [KR/KR]; 320-507 Mokdongshinsigaji Apt., 903, Mok-dong, Yangcheon-gu, Seoul 158-050 (KR). **KIM,**

Young-Kwan [KR/KR]; 122-104 Jinheung Apt., 97-3 Anyang-dong, Manan-gu, Anyang-city, Kyungki-do 430-010 (KR).


(74) Agent: **LEE, Young-Pil**; The Cheonghwa Building, 1571-18 Seocho-dong, Seocho-gu, Seoul 137-874 (KR).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: **CIRCUIT FOR DRIVING LIGHT EMITTING DEVICE AND MATRIX-TYPE DISPLAY PANEL EMPLOYING THE SAME**

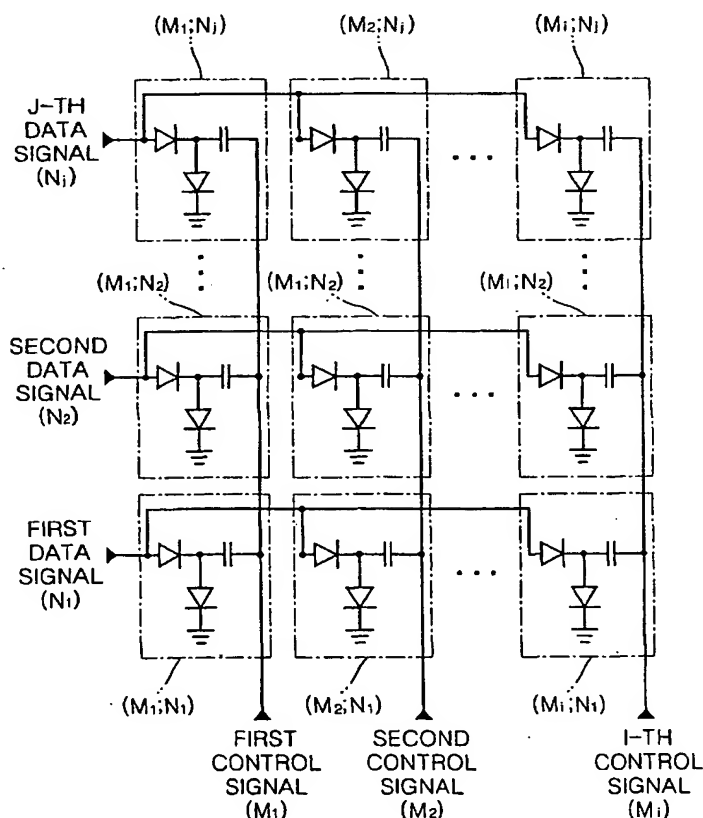

(57) Abstract: A circuit for driving a light emitting device and a matrix-type display panel employing the same are provided. The circuit for driving a light emitting device having a first pole and a second pole opposite to the first pole includes a diode, which includes a first pole to which a predetermined data signal is applied and a second pole which is opposite to the first pole and is connected to the first pole of the light emitting device, and a capacitor, which includes a first terminal connected to a contact point between the first pole of the light emitting device and the second pole of the diode and a second terminal to which a predetermined control signal is applied. Accordingly, if the diode is turned on and the light emitting device is turned off, an electric charge which corresponds to a difference between a voltage level of the control signal and a voltage level of the data signal is charged, and if the diode is turned off and the light emitting device is turned on, the charged electric charge is discharged through the light emitting device.

WO 03/065337 A1

WO 03/065337 A1

10/502391
Rec'd PCT/PTO 26 JUL 2004

ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report